

Location: _____




SUPER

SUPERMAX® GRAVITY GREASE INTERCEPTOR

Specification: MIFAB® SUPER-_____ gravity grease interceptor with _____ U.S. gallons of liquid holding capacity has a limited lifetime warranty and is made in the U.S.A. out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor is designed for above or below ground installation and includes an adjustable lid system, sample port access, internal baffle, deep seal trap covered by lid, internal air relief by-pass, stainless steel calibrated orifice plate (internal flow control), base for support and floor level installation and 4" no hub inlet and outlet connections. Steel encased composite lids provide a water / gas tight seal and have a minimum of 20,000 LB. load capacity - in accordance with the loading requirements of AASHTO H20. The high density polyethylene material is PE 3135 from Dow 9.39 with a density of 0.939 g/cm3. Note that the interceptor is tested and certified to the ASME A112.14.3, CSA B481 and ANSI Z1001 Standards and listed with I.A.P.M.O.

Function: Used in restaurants, kitchens, institutions, industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the waste water. All SuperMax gravity interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

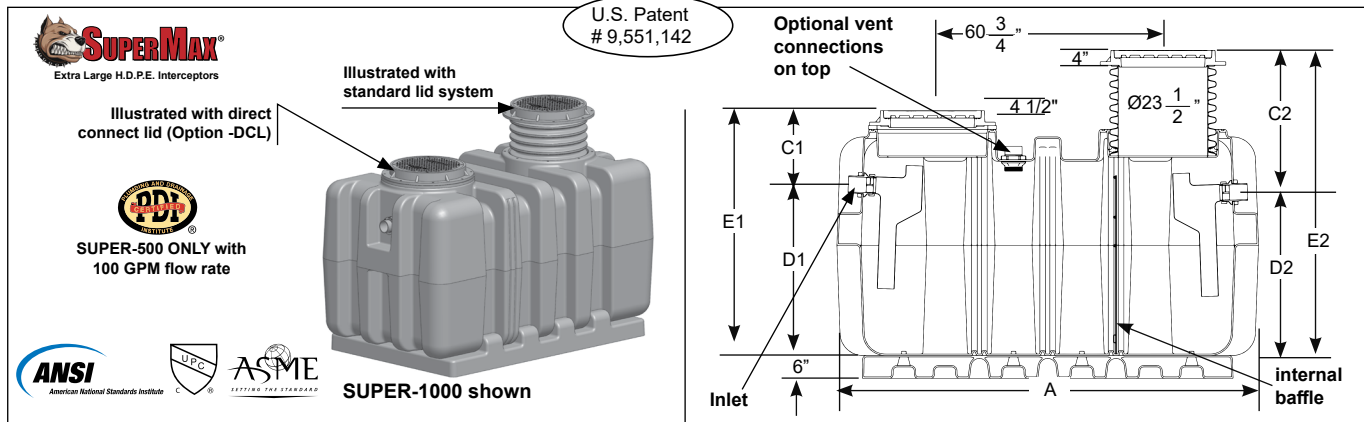

| Model | Liquid Holding Capacity | Grease Retention Capacity | Flow Rate (GPM) | A | Width B | C' Dim. | C² Dim. | D' Dim. | D² Dim. | E' Dim. | E² Dim. | F Connection Size | Shipping Weight (Lbs.) |
|------------|--------------------------------|---------------------------|-----------------|----------------|---------------|-----------------|-----------------|------------------|------------------|-------------------|------------------|-------------------|------------------------|
| SUPER-500 | 500 U.S. Gallons 1,890 Litres | 1,916 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 26.25" 667mm | 24.25" 616mm | 45" 1143mm | 61.50" 1562mm | 4" 102mm | 950 |
| SUPER-750 | 750 U.S. Gallons 2,840 litres | 2,875 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 34.88" 886mm | 32.88" 835mm | 53.63" 1362mm | 70.13" 1781mm | 4" 102mm | 1,015 |
| SUPER-1000 | 1000 U.S. Gallons 3,790 litres | 3,833 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 45.25" 1149mm | 43.25" 1099mm | 64" 1626mm | 61.50" 1562mm | 4" 102mm | 1,075 |
| SUPER-1250 | 1250 U.S. Gallons 4,921 litres | 4,983 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 56.25" 1429mm | 54.25" 1378mm | 75" 1905mm | 91.50" 2324mm | 4" 102mm | 1,150 |
| SUPER-1300 | 1300 U.S. Gallons 4,921 litres | 4,983 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 56.25" 1429mm | 54.25" 1378mm | 75" 1905mm | 91.50" 2324mm | 4" 102mm | 1,150 |
| SUPER-1500 | 1500 U.S. Gallons 5,680 litres | 5,750 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 64" 1626mm | 62" 1575mm | 82.75" 2102mm | 99.25" 2521mm | 4" 102mm | 1,250 |
| SUPER-2000 | 2000 U.S. Gallons 7,570 litres | 6,600 lbs. | 250 | 111" 2820mm | 64" 1630mm | 18.75" 476mm | 37.25" 946mm | 85.50" 2172mm | 83.50" 2121mm | 104.25" 2648mm | 120" 3048mm | 4" 102mm | 1,350 |

| Suffix | Optional Variations | | |
|--------|---|---------|--|
| -AK | Anchor kit (set of two) | -LHSO | 4" no hub outlet on left hand side |
| -C | Lid extension (specify dimension required) | -POK | Remote pump out kit |
| -COA | Coalescer Pack | -RHSI | 4" no hub inlet on right hand side |
| -DI | Ductile iron lid & collar | -RHSO | 4" no hub outlet on right hand side |
| -DP | Dosing pump | -RPO | 4" Remote pump outlet connections on top of interceptor - specify location and number required |
| -EP | Enzyme port | -SB | Sediment bucket |
| -FL-C | Membrane clamp kit | -SP | External Sampling port - inline, high connections (Part # BIG-SP) |
| -F6 | 6" No Hub Inlet / Outlet connection (flow rate of 700 GPM with 6" connections) | -SP-L | External Sampling port - inline, low connections (Part # BIG-SP-L) |
| -F8 | 8" No Hub Inlet / Outlet connection (fabricated stainless steel) (flow rate of 1,200 GPM with 8" connections) | -SP-OFF | External Sampling port - offset (Part # BIG-SP-OFF) |
| -HLA | High level alarm and float switch (to be installed on site) | -SST | Fire resistant fabricated stainless steel interceptor |
| -LHSI | 4" no hub inlet on left hand side | -ST | Fire resistant fabricated 10 gauge powder epoxy coated steel interceptor |
| | | -V | Vent connection - 4" (specify number required and location - side and / or top) |
| | | -3 | Stainless steel veneer bolted to top of ductile iron grates |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB® reserves the right to make changes in material and design without formal notice & obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880