

Location: _____




SUPER

SUPERMAX® GRAVITY GREASE INTERCEPTOR

Specification: MIFAB® SUPER-_____ gravity grease interceptor with _____ U.S. gallons of liquid holding capacity has a limited lifetime warranty and is made in the U.S.A. out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor is designed for above or below ground installation and includes extension pipe gasket for ADS 24N12 (pipe not included) for the adjustable lid system, sample port access, internal baffle, deep seal trap covered by lid, internal air relief by-pass, stainless steel calibrated orifice plate (internal flow control), base for support and floor level installation and 4" no hub inlet and outlet connections. Steel encased composite lids provide a water / gas tight seal and have a minimum of 20,000 LB. load capacity - in accordance with the loading requirements of AASHTO H20. The high density polyethylene material is PE 3135 from Dow 9.39 with a density of 0.939 g/cm3. Note that the interceptor is tested and certified to the ASME A112.14.3, CSA B481 and ANSI Z1001 Standards and listed with I.A.P.M.O. The -PDI model is tested and certified to the PDI G-101 Standard, 100 GPM flow rate.

Function: Used in restaurants, kitchens, institutions, industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the waste water. All SuperMax gravity interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

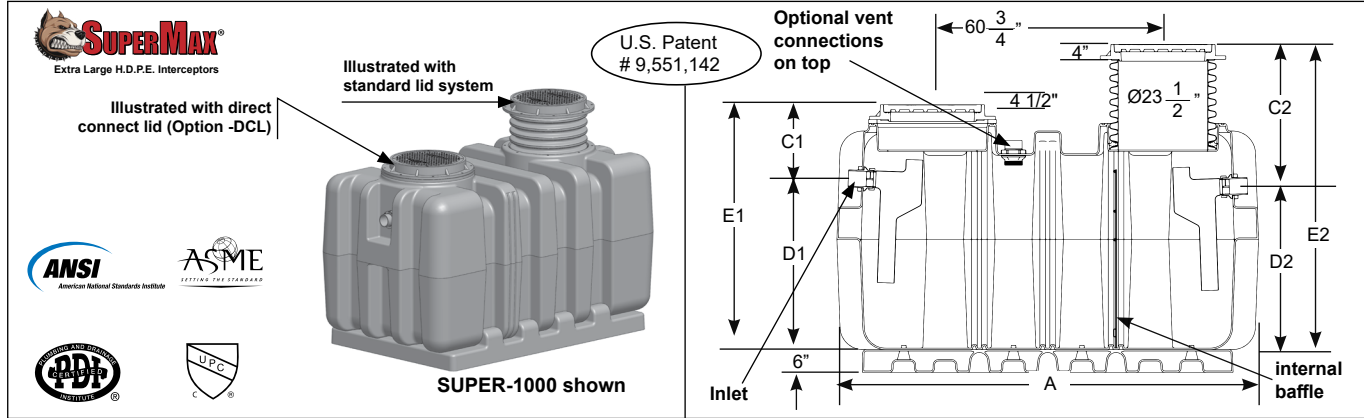

Model	Liquid Holding Capacity (Gallons / Cu. Ft.)	Grease Retention Capacity	Sediment Capacity (Gallons)	Flow Rate (GPM)	A	Width B	C' Dim.	C² Dim.	D¹ Dim.	D² Dim.	E¹ Dim.	E² Dim.	F Connection Size	Shipping Weight (Lbs.)
SUPER-500	539 / 72	3,492 lbs.	53	250 (Note: the flow rate is 100 GPM for the PDI model)	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	26.25" / 667mm	24.25" / 616mm	45" / 1143mm	61.50" / 1562mm	4" 102mm	950
SUPER-750	772 / 103	5,002 lbs.	77	250	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	34.88" / 886mm	32.88" / 835mm	53.63" / 1362mm	70.13" / 1781mm	4" 102mm	1,015
SUPER-1000	1,015 / 135	6,577 lbs.	102	250	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	45.25" / 1149mm	43.25" / 1099mm	64" / 1626mm	80.50" / 2045mm	4" 102mm	1,075
SUPER-1250	1,262 / 168	8,177 lbs.	126	250	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	56.25" / 1429mm	54.25" / 1378mm	75" / 1905mm	91.50" / 2324mm	4" 102mm	1,150
SUPER-1300	1,312 / 175	8,501 lbs.	131	250	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	56.25" / 1429mm	54.25" / 1378mm	75" / 1905mm	91.50" / 2324mm	4" 102mm	1,150
SUPER-1500	1,522 / 202	9,862 lbs.	152	250	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	64" / 1626mm	62" / 1575mm	82.75" / 2102mm	99.25" / 2521mm	4" 102mm	1,250
SUPER-2000	2,022 / 269	13,102 lbs.	202	250	111" / 2820mm	64" / 1630mm	18.75" / 476mm	37.25" / 946mm	85.50" / 2172mm	83.50" / 2121mm	104.25" / 2648mm	120" / 3048mm	4" 102mm	1,350

SUFFIX	OPTIONAL VARIATIONS	PART NO.
-AK	Anchor kit for all SuperMax interceptors	SUPER-*-AK-SET (* = Specify Size)
-ASME	100 GPM hydro-mechanical grease interceptor	SUPER-500-ASME
-C	Lid Extension - up to 44" high - (2 pieces included)	SUPER-EXT-44
-C	Lid Extension - up to 72" high - (2 pieces included)	SUPER-EXT-72
-C	Lid Extension - up to 94" high - (2 pieces included)	SUPER-EXT-94
-DI	Ductile iron lid and collar - for all SuperMax interceptors (2 pcs. Included)	SM-MI-G-PL-LID-DI
-DP	Dosing Pump for Lil Max, Big Max, SuperMax	XL-MI-PL-DP
-EP	Enzyme port for Lil Max, Big Max, SuperMax	XL-MI-PL-EP
-FL-C	Membrane clamp kit - for all SuperMax interceptors (2 pcs. Included)	SUPER-FLM (2 pcs. Included)
-F6	6" no hub inlet and outlet (2 pcs. Included) (flow rate of 700 GPM with 6" connections)	MI-G-PL-PF6
-F8	8" no hub inlet and outlet (2 pcs. Included) (flow rate of 1200 GPM with 8" connections) (not available for side inlets / outlets)	MI-G-PL-PF8
-HLA	High level alarm and float switch (to be installed on site) (for Lil Max, Big Max, SuperMax)	XL-MI-PL-HLA
-LHSI	No hub inlet on left hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-LHSO	No hub outlet on left hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-PDI	PDI plate and external, vented flow control fitting (to meet PDI G-101 Standard)	-PDI
-POK	Remote pump out kit	SUPER-MAX-POK
-RHSI	No hub inlet on right hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-RHSO	No hub outlet on right hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-RPO	4" Remote pump outlet connections on top of interceptor - specify location and number required	SUPER-MAX-RPO
-SB	Sediment bucket - for all SuperMax interceptors	SUPER-*-PSB (* = Specify Size)
-SP	External sampling port - inline, high connections	SUPER-SP
-SP-L	External sampling port - inline, low connections	SUPER-SP-L
-SP-OF	External sampling port - offset	SUPER-SP-OF
-SST	Fire resistant fabricated stainless steel interceptor	Contact MIFAB®
-ST	Fire resistant fabricated 10 gauge powder epoxy coated steel interceptor	Contact MIFAB®
-T	Female threaded connections - 4" (2 pcs. Included)	MI-G-PL-PF4T
-V	No hub vent connection - 4" - (specify number required and location - side and / or top) (2", 3" available - Specify -V2, -V3 - same price)	MI-G-PL-PF4

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____